

Data Sheet E300 Series Enterprise Router

2022 - 10 - 26

The Cradlepoint NetCloud Enterprise Branch Service with E300 Series Router is ideally suited for providing 4G and 5G cellular connectivity, agile VPN security, and cellular optimized SD-WAN to pop-up temporary locations, branches, stores, and clinics. The all-in-one form factor includes full-featured routing, security, and Wi-Fi, making it easy to connect offices and sites to the Internet and critical applications without the need for extra hardware or complicated configurations. And the embedded 5G or LTE modem means that connectivity is always available from day 1 without waiting for a wired connection.

Ideal for Wireless WAN

For organizations moving to a Wireless WAN, the E300 offers the ability to pair 5G or LTE with a wired link and use a cellular link as a failover connection, hybrid WAN or a primary connection. For an all-wireless WAN, the E300 offers 5G or LTE performance, which can support the throughput needs of a small- or medium-sized office with the ability to add a second cellular connection to increase available bandwidth and reliability.

5G, SD-WAN, and Security Integration

5G has emerged as an essential WAN infrastructure to offer agile and reliable connections. The E300 Enterprise Router with 5G cellular intelligence makes it easy to deploy 5Genabled networks while optimizing both cellular and wired traffic to enhance application performance. Security postures can be reinforced, and attack surfaces minimized with zero trust privileged access, protected IP addresses, detailed security policies and consolidated authentication usage.

Additionally, the E300 router can serve as the user equipment router for private cellular networks that provide reliable local area network connectivity where wireless LAN fails to meet the network needs due to large areas or excessive congestion.





NetCloud Service



Quick Start Guide

Notable Features

- Connect to the internet or applications anywhere with all-wireless 5G or LTE connectivity.
- Terminate a primary wired broadband link with cellular as failover for highly resilient hybrid connectivity.
- Open temporary locations without compromising security or reliability with an all-in-one design and compact form factor.
- Reduce network attack surface, build encrypted tunnels, and incorporate zero trust principles with NCX Secure Connect.
- Optimize cellular and wired traffic flows for the best quality of experience (QoE) with SD-WA.
- Define policies through centralized, cloud-based management for easy deployment at scale.
- Add a second cellular modem for dual cellular connectivity.
- Acts as Captive Modem controller for Cradlepoint 5G Wideband Adapters

Product Page




Key Software Capabilities

Cradlepoint NetCloud Service for the E300 provides everything needed to unlock the power of 5G and LTE at the network edge and connect users and IoT devices to critical applications and services. The NetCloud Service package for the E300 includes router software for optimizing routing, VPN, SD-WAN, and security capabilities. The cloud capabilities include group policy definition, reports, troubleshooting, and analytics dashboards. The service includes a warranty for as long as there is an active subscription on the router, online training, live and online support, and all software and firmware updates.


SD-WAN and Routing Services

SD-WAN and routing hardware provides local processing power to handle demanding router-delivered services, such as support for VPN tunneling encryption that includes NetCloud Exchange Secure Connect, DMVPN, IPsec, GRE, and other tunneling technologies. NetCloud Exchange SD-WAN optimizes cellular and wired traffic but adds data plan and carrier selection capabilities needed for wireless. NetCloud delivers true zero-touch deployment with the ability to define and deliver policy across entire groups of endpoints.

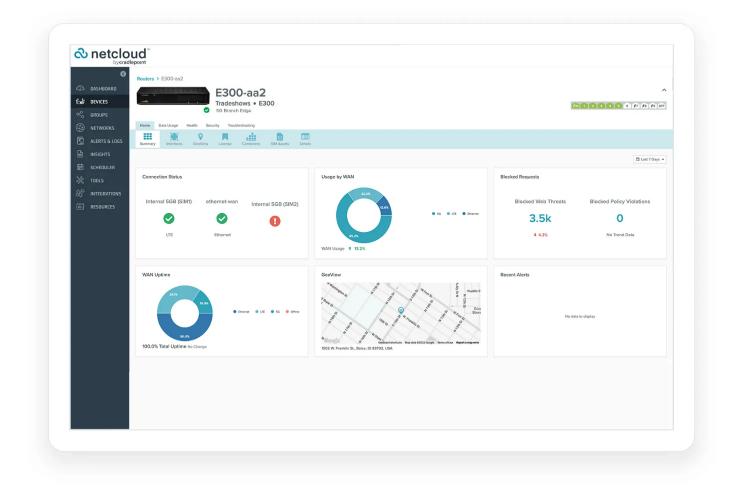


Security Services

NetCloud Service includes security features and options to optimize the E300 to meet the evolving security needs of distributed environments. The Essential service includes stateful zone-based firewall enhancement capability to Application Aware Traffic Steering with the Advanced package. Secure remote management and other security add-on capabilities such as IPS, Content Filtering, and NetCloud Exchange ZTNA help reduce the network attack surface.

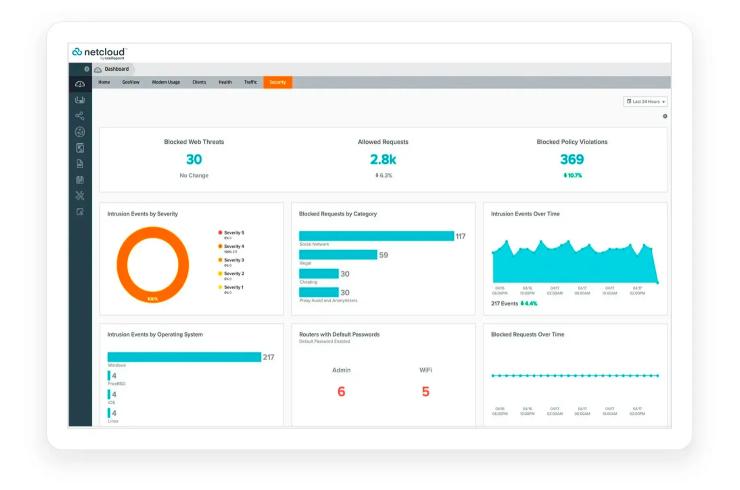


Cellular Intelligence

NetCloud Cellular Intelligence collection of software features that allow administrators with distributed Wireless WANs to visualize, optimize, and troubleshoot cellular connections, data plans, and traffic flow. These insights give IT teams the necessary tools to manage the unique demands of cellular with more predictable connectivity, deeper insights, and more accurate cost containment.

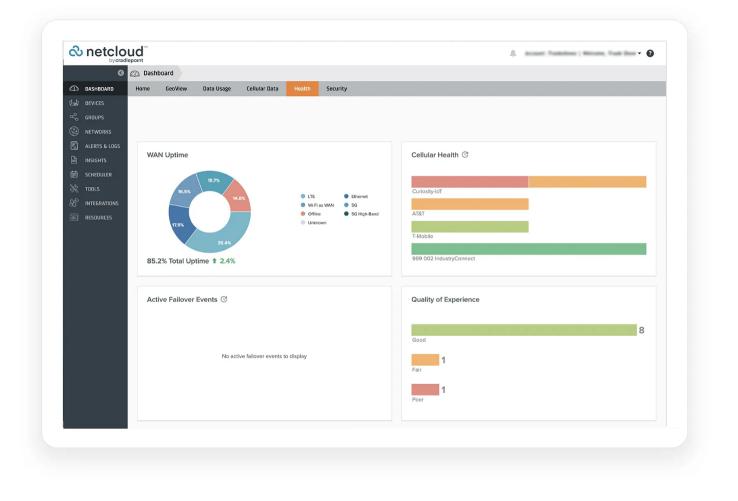


Remote Access and Troubleshooting

Connection Manager provides the ability to manage all WAN connection types, both wireless and wired, from a single software-defined policy. Our custom-built modem software ensures users establish Wireless WAN connectivity faster while maintaining the highest level of resiliency.

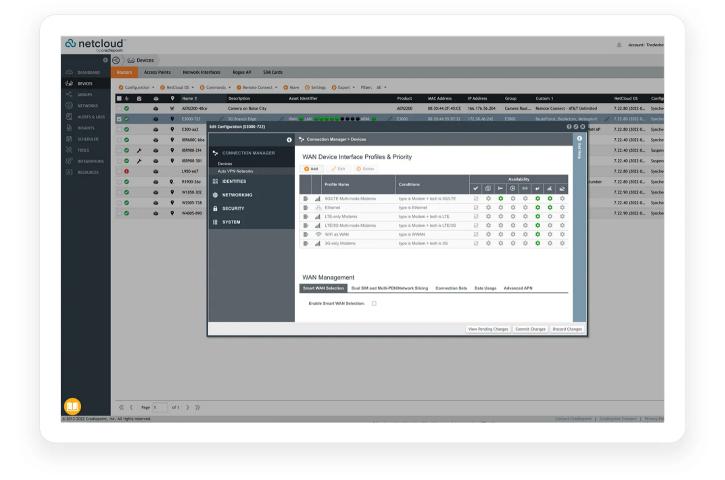

Cloud Insights

Use the dashboard for analytics on client, traffic, and modem data usage to gain insights into network status and make necessary adjustments. Configure device and wireless-carrier alerts to notify when important thresholds or limits are reached to know when to make changes

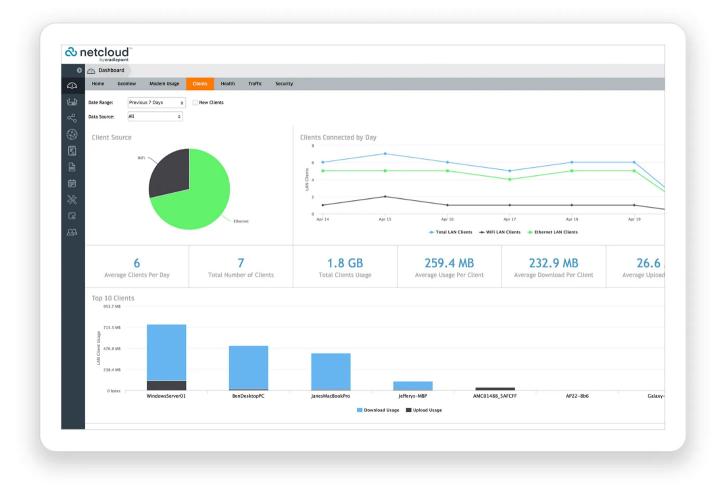

Hardware Specifications

The following features are delivered through the hardware.

INTERFACES	
Modem:	One of the following:
	 Embedded 5GB low/mid-band modem, including 4 x SMA cellular antenna connectors Embedded Cat 7 LTE modem, including 2 x SMA cellular antenna connectors Embedded Cat 18 LTE modem, including 4 x SMA cellular antenna connectors
	Optional dual modem:
	— Modular MC400 Modem
Ethernet:	 5 x GbE RJ45 (LAN/WAN switchable) 1 x 10 GbE SFP+ (LAN/WAN switchable) SFP: Finisar FTLF8519P3BNL, FTLF1318P3BTL SFP+: Finisar FTLX8574D3BCL, FTLX1475D3BCL, FCBG110SD1Cxx



Wi-Fi:	Dual-radio, dual-band, concurrent operation (2.4 GHz and 5 GHz)
	- 2x2 MU-MIMO 802.11ax Wi-Fi 6 with DFS
	— 574 Mbps (2.4 GHz) and 1,200 Mbps (5 GHz)
	 Internal 2x2 antenna
	 Global Optimized Wi-Fi
	 WPA/WPA2/WPA3 Personal, WPA2/WPA3 Enterprise, Open
	- 802.11k, 802.11v
Expansion:	 1 x MC400 Modular Modem Slot (Peak throughput: 300 Mbps)
	 1 x USB 2.0 Type A (output: 5V, 500mA, 2.5W)
	- 1 x Expansion Slot
	 MC20BT Bluetooth[®] wireless technology Low Energy Module
GNSS/GPS:	1 x SMA GNSS antenna connector [†]
ENVIRONMENTAL	
Temperature:	 Operating: 0 °C to 45 °C (32 °F to 113 °F)
	 Storage: -20 °C to 70 °C (-4 °F to 158 °F)
Humidity:	 Operating: 10% to 90%
	 Storage: 5% to 95%
POWER	
Required:	Powered by external DC power supply, 100-240 VAC input, 12 VDC 3A output (included)
PHYSICAL	
Size:	135 x 270 x 44 mm (5.3 x 10.6 x 1.7 in)
Weight:	.86 kg (1 lb 14 oz)
CERTIFICATIONS	
Safety:	UL/cUL, CB Scheme, EN 60950-1, EN 62368-1
Materials:	WEEE, RoHS, REACH, California Prop 65
WI-FI POWER:	
FCC:	- 2.4 GHz: 33.14 dBm EIRP
	- 5150–5250 MHz: 32.94 dBm EIRP
	- 5250–5350 MHz: 29.90 dBm EIRP
	- 5470–5725 MHz: 30.00 dBm EIRP
	- 5725–5850 MHz: 32.81 dBm EIRP
IC:	— 2.4 GHz: 33.14 dBm EIRP
	— 5150–5250 MHz: 25.74 dBm EIRP
	— 5250–5350 MHz: 25.84 dBm EIRP
	— 5470–5725 MHz: 29.82 dBm EIRP



Europe:	— 2.4 GHz: 19.93 dBm EIRP
	— 5150-5250 MHz: 22.76 dBm EIRP
	— 5250-5350 MHz: 22.92 dBm EIRP
	- 5500-5700 MHz: 29.08 dBm EIRP
Australia/ New Zealand:	- 2.4 GHz: 19.93 dBm EIRP
	- 5150-5250 MHz: 22.98 dBm EIRP
	- 5250-5350 MHz: 22.98 dBm EIRP
	- 5500-5700 MHz: 29.82 dBm EIRP
	— 5475-5825 MHz: 32.81 dBm EIRP
PERFORMANCE	
Stateful Firewall Throughput:	940 Mbps
IPS Throughput:	940 Mbps
Application Aware Services & Analytics:	940 Mbps
IPSec VPN Throughput:	400 Mbps
Concurrent VPN Tunnels:	20
Concurrent Sessions (TCP):	130,000
Typical Client Count:	50
LEDs	
	Refer to the E300 Series Enterprise Branch Router Quick Start Guide.

†Not available on E300-5GB routers.Performance testing conducted based on requirements as defined in RFC2544 using fixed-frame 1518 byte packets. Throughput results reflect uni-directional UDP traffic with less than 1% packet loss as tested with wired connections.Results do not reflect performance of the cellular wireless operator networks.

Enterprise-Class Modem Specifications

SPECIFICATION	E300-C18B
Technology:	Cat 18 LTE Advanced Pro (3GPP Rel. 12)
	 Dual SIM slots, 2FF form factor SIM-based auto-carrier selection
3G:	WCDMA/UMTS/HSPA+
Carrier Aggregation:	Up to 5 x CA downlink, 2 x CA uplinkRefer to the Modem Carrier Aggregations article.
Peak Downlink Rates:	 LTE: 1.2 Gbps WCDMA: 42.2 Mbps
Peak Uplink Rates:	 LTE: 150 Mbps WCDMA: 5.76 Mbps
MIMO:	4x4 MIMO
Modulation:	Up to 256 QAM



4G/LTE Bands:	LTE FDD
Haren Banas.	
	- B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B18, B19, B20, B25, B26, B28, B29, B30, B32, B66, B71 LTE
	TDD B38, B39, B40, B41, B42, B43, B46, B48
3G Bands:	B1, B2, B4, B5, B8, B19
Power:	LTE 23 dBm \pm 1, DC-HSPA+ 23 dBm \pm 1 (typical conducted)
Antennas:	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 4, included)
GNSS/GPS:	Active GNSS
	- GPS, GLONASS, BeiDou, Galileo
	- DC voltage bias supplied (typical 3.1v)
SMS:	Yes
Regulatory:	FCC (U.S.), IC (Canada), CE, RCM
Network Operator Standards:	PTCRB (U.S., Canada), GCF (Worldwide)
Network Operator	AT&T, Telstra (Cat 16), T-Mobile, Verizon [†]
Certifications:	
Public Safety Network	Verizon Frontline
Certifications:	
Private Cellular Network:	Yes, includes FCC Part 96 (CBRS OnGo Band 48)

†Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.

SPECIFICATION	E300-5GB
Technology:	5G NR (Low/Mid-Band FR1) and 4G LTE Category 20 LTE Advanced Pro with Dual Connectivity
	 Dual SIM slots, 2FF form factor
	 SIM-based auto-carrier selection
3G:	WCDMA/UMTS/HSPA+
Carrier Aggregation:	LTE only; up to 7CA downlink, 2CA uplink ENDC 5G + LTE; downlink and uplink supported
	Refer to the Modem Carrier Aggregations article.
Peak Downlink Rates:	Up to 4.14 Gbps — based on 20 Layers LTE + TDD (100 MHz BW, 256 QAM, 4X4)
Peak Uplink Rates:	Up to 660 Mbps — based on 2 Layers LTE + TDD (100 MHz BW, 256 QAM, SISO)
MIMO:	4x4 MIMO
Modulation:	Up to 256 QAM — FR1
4G/LTE Bands:	B1, B2, B4, B5, B7, B8, B12, B13, B14, B18, B19, B20, B21, B25, B26, B28, B29, B30, B32, B34, B38, B39,
	B40, B41, B42, B43, B46, B48, B66, B71
5G NR Bands:	n1, n2, n3, n5, n7, n8, n12, n20, n25, n28, n38, n40, n41, n48, n66, n71, n77, n78, n79
Power:	LTE only; 23 dBm ± 1 (typical conducted)
	ENDC 5G + LTE; 20 dBm ± 1 (typical conducted)
Antennas:	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 4, included)
GNSS/GPS:	Passive GNSS (multiplex with DIV/MIMO2 antenna ports)



SMS:	Yes
Regulatory:	FCC (U.S.), CE (EU), RCM (AU/NZ)
Network Operator Standards:	PTCRB (U.S., Canada), GCF (Worldwide)
Network Operator	AT&T, T-Mobile, Verizon [†]
Certifications:	
Public Safety Network	T-Mobile Connecting Heros, Verizon Frontline
Certifications:	
Private Cellular Network:	Yes, includes FCC Part 96 (CBRS Band 48)

†Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.

SPECIFICATION	E300-C7C
Technology:	Cat 7 LTE (3GPP Rel. 11)
	Dual SIM slots, 2FF form factor
	SIM-based auto-carrier selection
3G:	WCDMA/UMTS/HSPA+
Carrier Aggregation:	Up to 2 x CA downlink, 2 x CA uplink
Carrier Aggregation.	Refer to the Modem Carrier Aggregations article.
Peak Downlink Rates:	LTE: 300 Mbps
	WCDMA: 42.2 Mbps
Peak Uplink Rates:	LTE: 150 Mbps
	WCDMA: 5.76 Mbps
MIMO:	2x2 MIMO
Modulation:	Up to 64 QAM
4G/LTE Bands:	LTE FDD
	B2, B4, B5, B7, B12, B13, B14, B25, B26, B66, B71
	LTE TDD
	B41, B42, B43, B48
3G Bands:	B2, B4, B5
Power:	LTE 22.5 dBm ± 1, DC-HSPA+ 23 dBm ± 1
Antennas:	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included)
GNSS/GPS:	Passive GNSS
SMS:	Yes
Regulatory:	FCC (U.S.), IC (Canada)
Network Operator Standards:	PTCRB (U.S., Canada)
Network Operator Certifications:	AT&T, T-Mobile, Verizon [†]



Private Cellular Network:


Yes, includes FCC Part 96 (CBRS Band 48)


fCellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.


neir network.	
SPECIFICATION	E300-C7D
Technology:	Cat 7 LTE (3GPP Rel. 11)
	Dual SIM slots, 2FF form factor
	SIM-based auto-carrier selection
3G:	WCDMA/UMTS/HSPA+
Carrier Aggregation:	Up to 2 x CA downlink, 2 x CA uplink
	Refer to the Modem Carrier Aggregations article.
Peak Downlink Rates:	LTE: 300 Mbps
	WCDMA: 42.2 Mbps
Peak Uplink Rates:	LTE: 150 Mbps
i cuk opinik Rates.	WCDMA: 5.76 Mbps
	Wobi IA. 0.701 lbps
MIMO:	2x2 MIMO
Modulation:	Up to 64 QAM
4G/LTE Bands:	LTE FDD
	B1, B3, B7, B8, B20, B28, B32
	LTE TDD
	B38, B40, B41, B42, B43
3G Bands:	B1, B5, B8
Power:	LTE 22.5 dBm ± 1, DC-HSPA+ 23 dBm ± 1
Antennas:	SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included)
GNSS/GPS:	Passive GNSS
SMS:	Yes
Regulatory:	CE (EU)
Network Operator Standards:	GCF (Worldwide)
Network Operator Certifications:	See note [†]
Public Safety Network Certifications:	N/A
Private Cellular Network:	N/A

tCellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.

Physical Measurements & Features

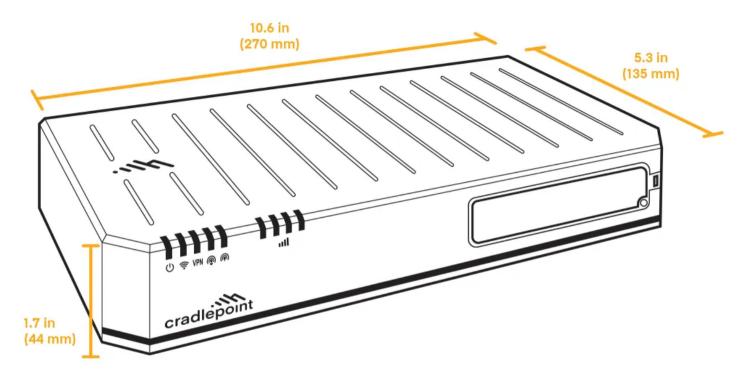

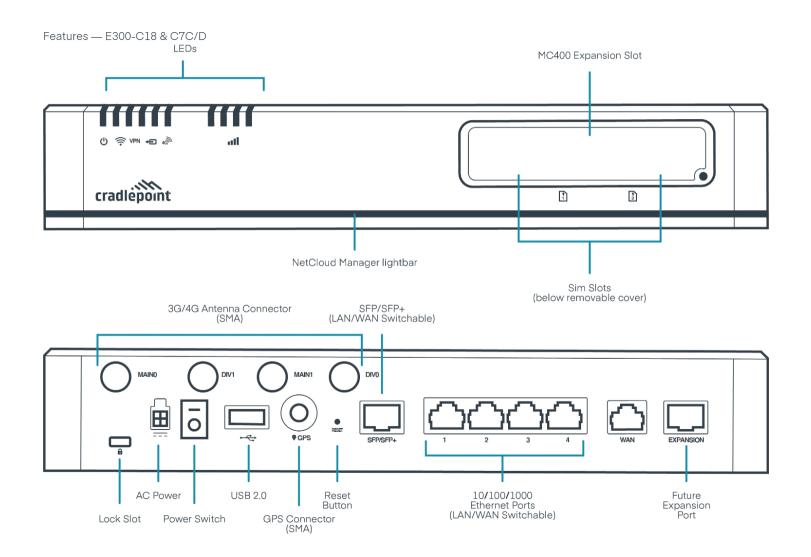

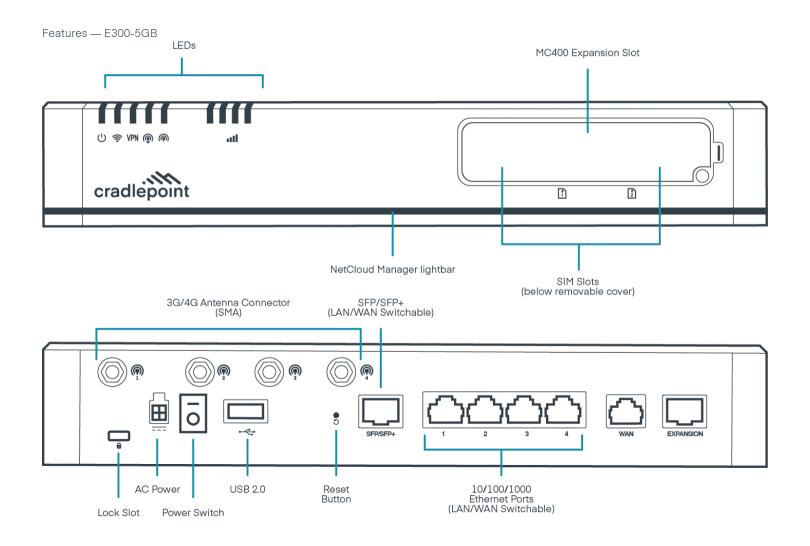

SIM Card Info



Ordering Guide

NetCloud Enterprise Branch Essentials packages and plans contain all the features and capabilities required for small to mid-sized branch applications. Essentials Packages include 24x7 support (phone support: 24 hour weekdays with emergency response on weekends, web: 24x7, chat: 24x5) and a limited lifetime warranty.



For additional capabilities, a

NetCloud Enterprise Branch Advanced Plan can be added to the NetCloud Enterprise Branch Essentials Package at any time. See additional details of what is included in the Essential and Advanced NetCloud software: cradlepoint.com/netcloud-service NetCloud Branch Packages for the E300 Series Router

REGION	MODEM	BRANCH PACKAGE PLAN	PART NUMBER
North America: U.S. & Canada	5G with Wi-Fi	Essentials	BF0x-03005GB-GN
		Essentials + Advanced	BFAx-03005GB-GN
	Cat 18 (1200 Mbps) with Wi-Fi	Essentials	BF0x-0300C18B-GN
		Essentials + Advanced	BFAx-0300C18B- GN
	Cat 7 (300 Mbps) with Wi-Fi	Essentials	BF0x-0300C7C-GN
		Essentials + Advanced	BFAx-0300C7C-GN
United States: Federal Government	5G with Wi-Fi	Essentials	ТАА- ВF0у-0300051038В-
		Essentials + Advanced	
			ТАА- ВFAy-030 05106 B-
	Cat 18 (1200 Mbps) with Wi-Fi	Essentials	TAA- BF0y-0300 (C:11% B-
		Essentials + Advanced	·
			TAA-
			BFAy-0300 @18 B-
	Cat 7 (300 Mbps) with Wi-Fi	Essentials	TAA- BF0y-0300 CM C-
		Essentials + Advanced	
			TAA-
			BFAy-0300000C-
Rest of World: European Union, United Kingdom, Australia, Malaysia,	5G with Wi-Fi	Essentials	BF0x-03005GB-GM
Singapore, South Africa & New Zealand		Essentials + Advanced	BFAx-03005GB-GM
	Cat 7 (300 Mbps) with Wi-Fi	Essentials	BFAx-0300C7D-GM
		Essentials + Advanced	BF0x-0300C7D-GM
	Cat 18 (1200 Mbps) with Wi-Fi	Essentials	BF0x-0300C18B- GM
		Essentials + Advanced	
			BFAx-0300C18B-
			GM



All Regions:	Renewal Essentials	BF0x-NCESS-R
	Advanced Upgrade	BF0x-NCADV
	Renewal Advanced Upgrade	BAx-NCADV-R
	Renewal Essentials +	BFAx-NCEA-R
	Advanced	

Accessories

INCLUDED	PART NUMBER
One of the following:	170716-000
Power Supply for North America, 12V, 2A, 2×2, -20 °C to 60 °C	170717-000
Power Supply for North America, 12V, 2A, 2x2, -20 °C to 60 °C Power Supply, 12V, 3A, -20 °C to 60 °C, 2x2, (U.S., EU, UK, AU clips)	
Power Suppry, 12V, 3A, -20 °C to 60 °C, 2x2, (0.3., E0, 0K, A0 Clips)	
Cellular Antenna, Charcoal, 600 MHz - 6 GHz, SMA, 152 mm (Qty 2 or 4)	170801-000
One of the following:	N/A
	N/A
E3000-C18B Cat 18 Cellular Antenna Alignment Tool	
E300-5GB Cat 18 Cellular Antenna Alignment Tool	
Wall Mount Screw Pack	N/A
Rubber Feet for Desktop Mounting	N/A
OPTIONAL	PART NUMBER
Enterprise Branch E300 Cat 18 LTE Advanced Pro Modular Modem Kit [†]	BF-MC400-1200M-E
MC400 Cat 18 LTE Advanced Pro Modular Modem. Includes modem door with screw and 4 cellular	BF-MC400-5GB
antennas	
MC400 5G Modem (requires 4FF SIM) upgrade for E300/E3000 Branch Routers. Includes doors and 4	
cellular antennas	
Small 2x2 Power to Barrel Adapter, 152 mm	170665-000
LTE Captive Modem Accessory, Indoor	170900-001
	170900-003
CBA550-150M-D (150 Mbps modem), Americas	170900-005
CBA850-1200M-B (1200 Mbps modem), Americas	
L950-C7A (300 Mbps modem), Americas	
5G Captive Modem Accessory, Outdoor	170900-007
	170900-011
W2005-5GB (4.1 Gbps modem), North America	
High-Band, W4005-5GB (7.5 Gbps modem), North America	

5G Captive Modem Accessory, Indoor	170900-012
W1850-5GB (4.1 Gbps modem), Americas	
Bluetooth® wireless technology Low Energy 5.1 (BLE) Module for E300 and E3000 Series Routers	BF-MC20-BT
UNITED STATES FEDERAL GOVERNMENT	PART NUMBER
Power Supply, 12 V Small 2x2, 1.5 meters (North America Type A)	TAA-170716-000
Power Supply, 12 V Small 2x2, 1.5 meters (North America-United Kingdom-Europe-Australia Types A-G-C-I)	TAA-170717-000
Small 2x2 Power to Barrel Adapter, 152 mm	TAA-170665-000
Cellular Antenna, Charcoal, 600 MHz - 6 GHz, SMA, 180 mm	TAA-170801-000
LTE Captive Modem Accessory, Indoor	TAA-170900-001
CBA550-150M-D (150 Mbps modem), Americas L950-C7A (300 Mbps modem), Americas	TAA-170900-005
5G Captive Modem Accessory, Outdoor	TAA-170900-007
W2005-5GB (4.1 Gbps modem), North America	TAA-170900-011
High-Band, W4005-5GB (7.5 Gbps modem), North America	
5G Captive Modem Accessory, Indoor	TAA-170900-012
W1850-5GB (4.1 Gbps modem), Americas	
MC400 Modular Modem [†] :	ТАА-ВF- МС400- В 200М-
LTE Advanced Pro Cat 18 (1200 Mbps) modem upgrade for E300/E3000 Enterprise Branch Routers with	TAA-BF-MC400-5GE
doors and 4 charcoal antennas	
5G Modem (requires 4FF SIM) upgrade for E300/E3000 Branch Routers with doors and 4 antennas	
Bluetooth [®] wireless technology Low Energy 5.1 (BLE) Module for E300 and E3000 Series Routers	TAA-BF-MC20-BT

Support & Warranty

The E300 Enterprise Branch Router is only sold as a component of NetCloud Branch Packages.

NetCloud Packages include support for the full subscription term.

All Cradlepoint hardware products are covered by a limited lifetime warranty for as long as they have a subscription license to an active NetCloud Service Plan.

More information

Find the most up-to-date information at cradlepoint.com/e300-series